

## ELAN PRIDE Series

MBB P-Type PERC Half-cut Bifacial PV Modules

ASB-M12-132-AAA (AAA=630-650) | 132 Cells | 630-650 Wp

### Highlights



MBB cell technology - excellent anti- microcracking performance with more balanced interior stress: grid pattern current path, lower cost



Up to 730 Wp at 15% bifaciality Gain\*\*  
Up to 70 ± 5 % bifaciality Factor



Longer Product life and performance -0.45 year over year degradation with 30 years warranty on power



Least Degradation for LID , LeTID




Modules Made with Ga doped wafer, Smart soldering , 12BB



High salt mist and ammonia resistance


### Higher generation due to bifacial technology

■ Adani bifacial module   ■ Standard Monofacial module

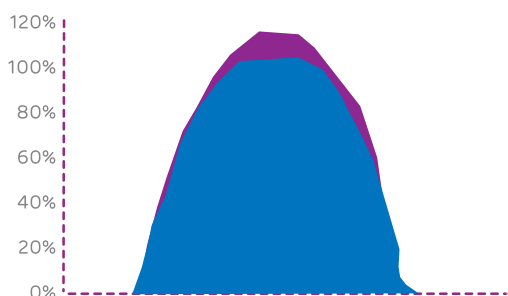

### Warranty based on Power


■ Adani Linear Warranty   ■ STD Linear Warranty

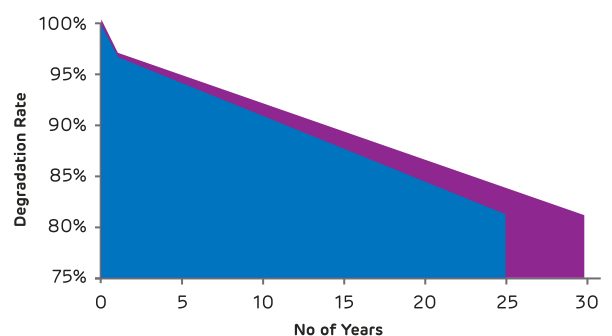


# Technical Data

Multi irradiance curve for ASB-M12-132-AAA

Cell temp: 25°C

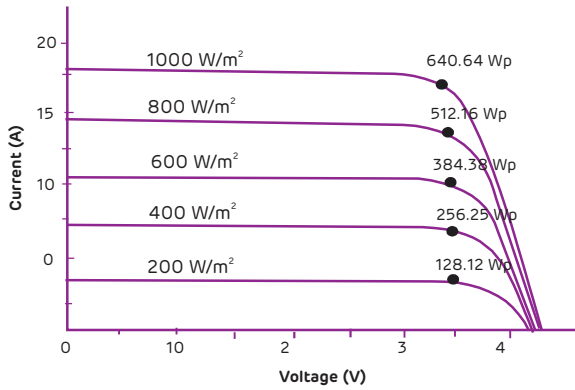

## Dimensions in mm

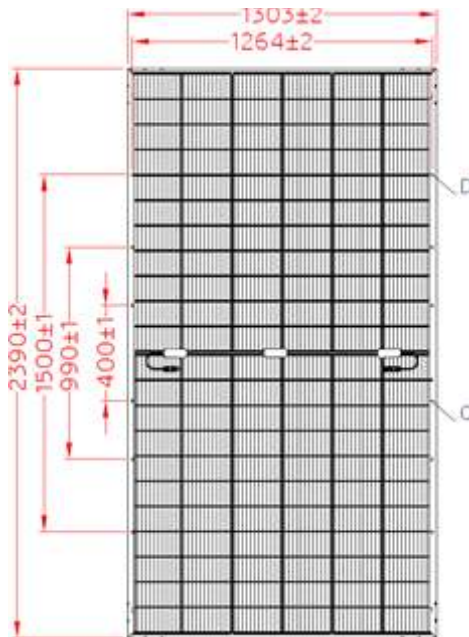

## Warranty and certifications

### Product warranty\*\*

12 years of product warranty

### Performance guarantee\*\*

Power degradation <2.0 % in first year  
<0.55 % / year in 2-30 years

Approvals and certificates\* : IEC 61215 Ed2, IEC 61730, IEC 61701, UL 1703, MCS, JET, CEC, CEC-Aus, IEC 62716, IEC 62782, IEC 60068-2-68, IEC 61853, BIS

\*All certifications are under process



## Electrical data – All data measured to STC\*

Electrical Specification	Only front (STC)				
Peak power, (0 ~+ 4.99 Wp)					
Pmax(Wp)	<b>630</b>	<b>635</b>	<b>640</b>	<b>645</b>	<b>650</b>
Maximum voltage, Vmpp (V)	36.66	36.82	37.01	37.15	37.32
Maximum current, Imp (A)	17.19	17.25	17.31	17.37	17.44
Open circuit voltage, Voc (V)	42.87	43.08	43.28	43.47	43.66
Short circuit current, Isc (A)	18.57	18.63	18.69	18.75	18.85
Module efficiency (%)	20.23	20.39	20.55	20.71	20.87

\*STC: Irradiance 1000 W/m², cell temperature 25°C, air mass AM1.5 according to EN 60904-3. Average efficiency reduction of 4.5 % at 200 W/m² according to EN 60904-1. Except Pmp, all other parameters have a tolerance of +/-3 %, measurement uncertainty <3 %

## Electrical Characteristics with different rear side power gain (Reference 640 Wp Front)

Electrical Specification	Pmax gain from rear side*			
Bifaciality Gain	5%	10%	15%	20%
Peak power, (0 ~+ 4.99 Wp) Pmax(Wp)	670	700	730	765
Maximum voltage, Vmpp (V)	37.01	37.01	37.01	37.01
Maximum current, Imp (A)	18.00	18.91	19.84	20.06
Open circuit voltage, Voc (V)	42.91	42.91	42.91	42.91
Short circuit current, Isc (A)	19.57	20.47	21.36	22.35
Module efficiency (%)	21.51	22.48	23.44	24.57

\* Power gain from rear side depends upon the ground reflectance (Albedo) & Bifaciality factor.

## Temperature co-efficients (Tc) and permissible operating conditions

Tc of open circuit voltage (β)	-0.25% /°C
Tc of short circuit current (α)	0.041% /°C
Tc of power (γ)	-0.34% /°C
Maximum system voltage	1500 V (IEC & UL)
NOCT	44°C ± 2°C
Temperature range	-40°C to + 85°C

## Mechanical data

Length	2390 mm
Width	1303 mm
Height	35 mm
Weight	39.9 kg
Junction box	IP68; Junction box, MC4 compatible
Cable and connectors	300 mm length cable, MC4 & Amphenol compatible connectors
Application class	Class A (Safety class II)
Superstrate	2.0mm High Transmission ARC, Heat Strengthened Glass
Cells	132 half-cut mono-crystalline P-type PERC bifacial solar cells; MBB
Encapsulation	High volume resistivity and low MVTR
Substrate	Semi Tempered Glass -2.0 mm
Frame	Anodized Frame
Mechanical load test as per IEC & UL	5400 Pa-front; 2400 Pa-back*
Maximum series fuse rating	30 A

## Packaging Configuration

Container	40'HC
Pieces / Container	558

\*\*Disclaimer : Pieces/Container will change subject to Packing design Modification.

### Note:

- The specifications included in this datasheet are subject to change without notice.
- The electrical data given here is for reference purpose only.
- Please confirm your exact requirements with the sales representative while placing your order.

### \*\* Warranty:

Please read Adani solar warranty documents thoroughly.

### \*Caution:

Please read safety and installation instructions before using the product.