

# Eagle 72M

## 330-350 Watt

### MONO CRYSTALLINE MODULE

Positive power tolerance of 0~+3%

ISO9001:2008、ISO14001:2004、OHSAS18001 certified factory.  
IEC61215、IEC61730 certified products.



(5BB)



## KEY FEATURES



### 5 Busbar Solar Cell:

5 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



### PID RESISTANT:

Limited power degradation of Eagle module caused by PID effect is guaranteed under strict testing condition (85 C /85%RH,96hours)for mass production.



### Low-light Performance:

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



### Severe Weather Resilience:

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




### Durability against extreme environmental conditions:


High salt mist and ammonia resistance certified by TUV NORD.

## LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty

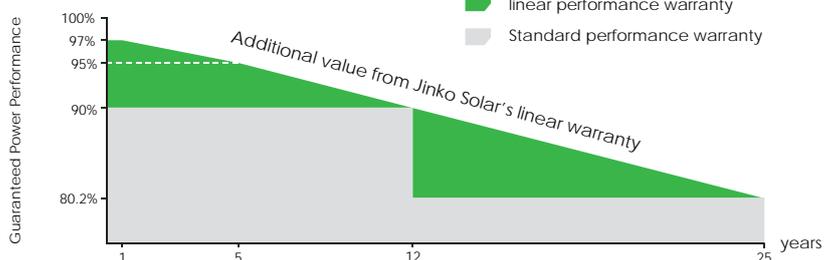

## Engineering Drawings

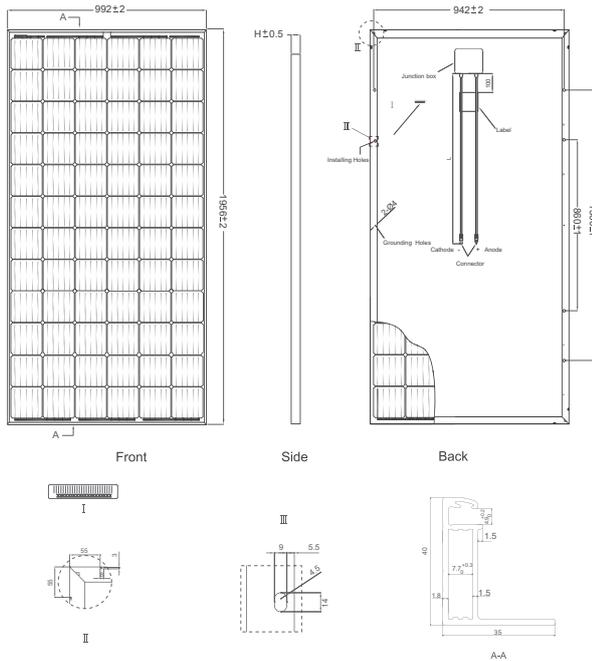


## Packaging Configuration

(Two pallets = One stack)

26pcs/pallet, 52pcs/stack, 624 pcs/40'HQ Container

## Electrical Performance & Temperature Dependence

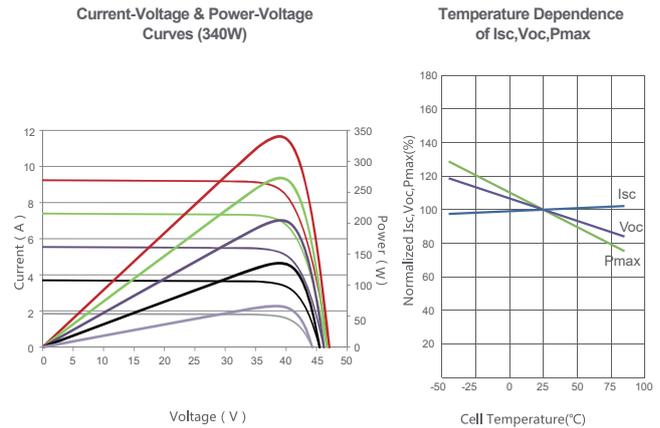

## Mechanical Characteristics

Cell Type	Mono-crystalline	156×156mm (6 inch)
No. of cells	72	(6×12)
Dimensions	1956×992×40mm (77.01×39.05×1.57 inch)	
Weight	22.5 kg (49.6 lbs)	
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass	
Frame	Anodized Aluminium Alloy	
Junction Box	IP67 Rated	
Output Cables	TÜV 1×4.0mm <sup>2</sup> ; Length:900mm or Customized Length	

## SPECIFICATIONS

Module Type	JKM330M-72		JKM335M-72		JKM340M-72		JKM345M-72		JKM350M-72	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	330Wp	246Wp	335Wp	250Wp	340Wp	254Wp	345Wp	258Wp	350Wp	262Wp
Maximum Power Voltage (Vmp)	38.2V	36.4V	38.4V	36.6V	38.7V	36.8V	38.9V	37.0V	39.1V	37.2V
Maximum Power Current (Imp)	8.64A	6.75A	8.72A	6.82A	8.79A	6.89A	8.87A	6.98A	8.94A	7.05A
Open-circuit Voltage (Voc)	46.7V	44.8V	46.9V	45.2V	47.1V	45.5V	47.3V	45.8V	47.5V	46.0V
Short-circuit Current (Isc)	9.11A	7.24A	9.18A	7.29A	9.24A	7.33A	9.31A	7.38A	9.38A	7.46A
Module Efficiency STC (%)	17.01%		17.26%		17.52%		17.78%		18.04%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1000VDC (IEC)									
Maximum series fuse rating	20A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.40%/°C									
Temperature coefficients of Voc	-0.29%/°C									
Temperature coefficients of Isc	0.048%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									

\* STC: Irradiance 1000W/m<sup>2</sup> Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m<sup>2</sup> Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

\* Power measurement tolerance: ± 3%

The company reserves the final right for explanation on any of the information presented hereby. EN-JKM-350M-72\_1.0\_rev2017

To buy, contact: Loop Solar | Tel: +91-9971136369 | Web: [www.loopsolar.com](http://www.loopsolar.com)